



PANASONIC TD500

CHANGING TIME AND DATE

◆◆ Procedure

The basic steps are shown below.


1. Entering the programming mode



4.3.1 Date and Time Set (000)

You can set / adjust the system date and time which affect system-wide operation. After setting the current date and time, the Proprietary Telephone displays the current date and time while on-hook.

Default: '00 JAN 1 SAT 12:00AM 12-hour clock time

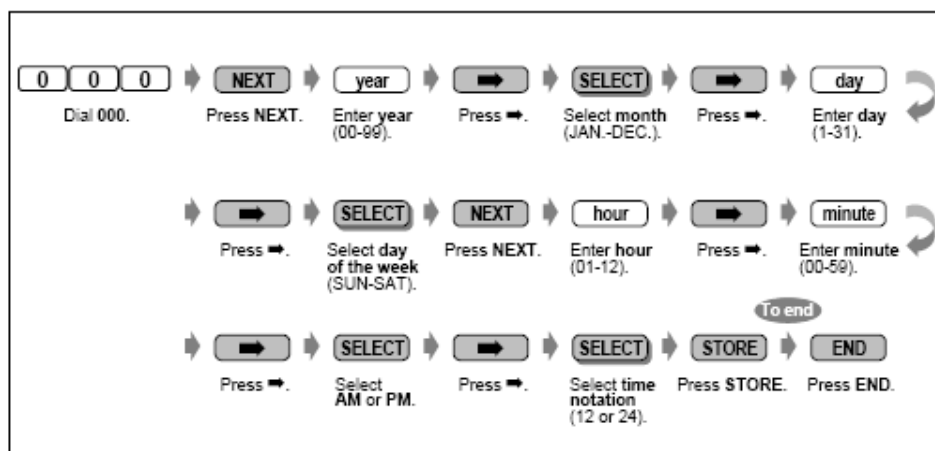

- After changing the desired entries, you can press the STORE button. You do not have to perform the rest of the steps.
- The clock starts immediately after the STORE button is pressed.
- You cannot leave an entry empty.